

Euroclean HydroDry™ Dryer

Optional Accessories Include:

- Wheel/handle kit for easy transportation and storage

Ideal Applications Include:

- Drying Carpets
- Drying Floors
- Drying Paint
- Cooling
- Ventilating



The Euroclean HydroDry™ blower quickly facilitates the drying of hard floors and carpets after scrubbing, waxing, finishing or extraction.

Easy to use and transport the HydroDry™ blower helps dry wet basements, flooded areas, fresh paint, concrete sealer or any surface that needs to be dried fast. It works well to aid ventilation when used in hot, closed areas or to remove smoke and fumes.

The Euroclean HydroDry™ blower is easy to store with molded in cord storage for its 25 foot, safety yellow cord. With its unique interlocking stacking feature several units can be


stored in a small space. A sturdy molded-in handle helps balance the HydroDry while carrying. With the optional wheel/handle kit multiple units can be easily transported.

The Euroclean HydroDry™ moves 1,600 – 2,500 cubic feet of air per minutes (45.3-70.8 m³/min). The powerful three-speed motor is quiet-running and efficient. At the low as 57 dB A noise level the HydroDry™ can be used anywhere and at any time.

The HydroDry™ housing design provides three stationary positions for directing air flow either flat over surfaces or up at either a 45° or a 90° angle.

Euroclean

Euroclean HydroDry™ Dryer

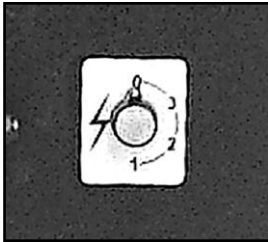

Convenient four-way rotating switch gives several fan speed options



With the optional wheel/handle kit multiple units can be easily transported




HydroDry blowers are designed to stack for storage or to gang up for additional air flow



Molded-in cord wrap for easy storage of the 25 foot long safety yellow power cord

Molded-in offset handle is designed to make the HydroDry™ easy to carry

Rotocast polyethylene housing is warranted for 10 years

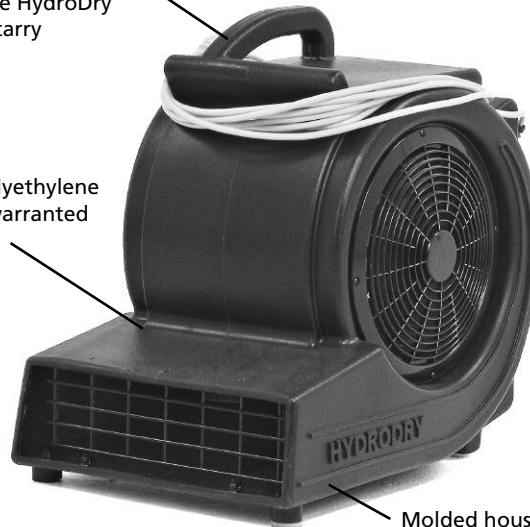

Molded housing is designed to sit flat or at 45° or 90° angles to direct air as needed

Euroclean products are necessary cleaning equipment used for every-day commercial cleaning applications.

You can get expert service and maintenance for your products by factory-trained personnel around the world, as well as fast parts delivery.

Maintain peak performance with Nilfisk Genuine OEM Parts.

 Nilfisk *Genuine OEM Parts*

Compact design with exceptional performance

Technical Specifications

Motor:	1/2 hp, 3 Speed, Single Phase 115 V / 50-60 Hz
Fan:	Painted Steel 10.5 in (26.7 cm) dia
Fan Speed:	2,500 cfm (70.8 m ³ /min) @ 1,150 rpm 2,000 cfm (56.6 m ³ /min) @ 900 rpm 1,600 cfm (45.3 m ³ /min) @ 750 rpm
Housing:	Rotocast Polyethylene
Power Cord:	25 ft (7.62 m) 3 prong
Noise Level:	57 dB A @ 750 rpm 59 dB A @ 900 rpm 73 dB A @ 1150 rpm
Weight:	35 lb (15.9 kg)
Shipping Weight:	40 lb (18.1 kg)
Part Number:	56 115 000

Specifications are subject to change without notice.

Euroclean

14600 21st Avenue North
Plymouth, MN 55447-3408
www.kenturoclean.com
Phone: 800-545-4372
Fax: 866-261-4779

396 Watline Avenue
Mississauga, Ontario, Canada L4Z 1X2
www.kenturoclean.com
Phone: 800-668-8400 or 905-712-3260
Fax: 800-263-5111 or 905-712-3255

©2006, Euroclean,
Printed in U.S.A., Form L1801E, 4/06